

BENJAMIN OBDYKE

roof & wall products

OPEN JOINT CLADDING SYSTEM

INVISIWRAP™ UV

HYDROFLASH® UV+

BATTEN UV

INVISIWRAP™ UV

ENHANCED UV FOR OPEN JOINT CLADDING

InvisiWrap UV is specially designed for use with architectural designs that incorporate “open joint claddings.” The product features a high performance black polyester nonwoven with a proprietary coating. The black color of the wrap enhances the aesthetic appeal to open joint architecture. When used in conjunction with a rainscreen it provides superior bulk water drainage, exceptional vapor permeability, and durability.



Specifications

Width	4.92 ft (1.5 m)
Length per roll	100 ft (30.48 m)
Max. UV exposure	365 days (before siding coverage)
Warranty	20 (product) or 25 (system) year limited
Composition	Polyester Nonwoven/Polyester Coating
Vapor Permeability	14 Perms


Features & Benefits

- 12 month UV exposure resistance (before siding coverage)
- Use with siding openings of up to 2 in.
- 25 year Open Joint System warranty
- Superior tear strength and water holdout


ACCESSORIES

HYDROFLASH® UV+

Width	2.3 in (60 mm), 4 in (100 mm), 6 in (150 mm)
Length Per Roll	82 ft (25 m)
Adhesive	Acrylic
Max. UV Exposure	365 Days (before siding coverage)
Temperature Range	Install down to 25°F, store above 40°F
Warranty	15 or 25 year System Warranty

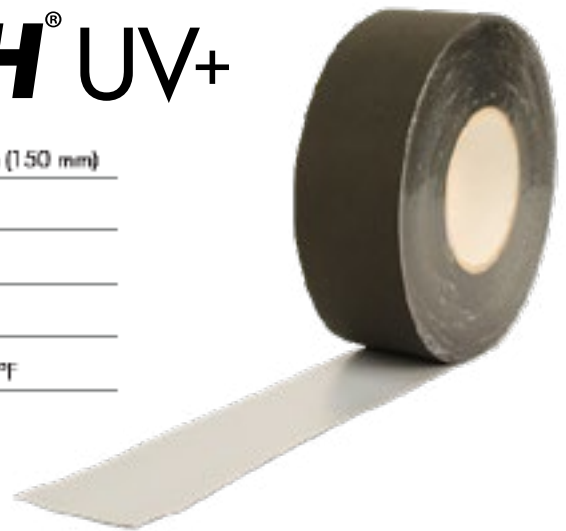

- AAMA 711 approved, meets criteria of AC 148
- Aggressive acrylic adhesive for extreme environmental conditions for InvisiWrap UV and HydroGap
- Ideal for Open Joint Cladding Applications
- Can be used for penetration flashing & covering furring strips behind open joints
- UV Rated for 12 months exposure before cladding application

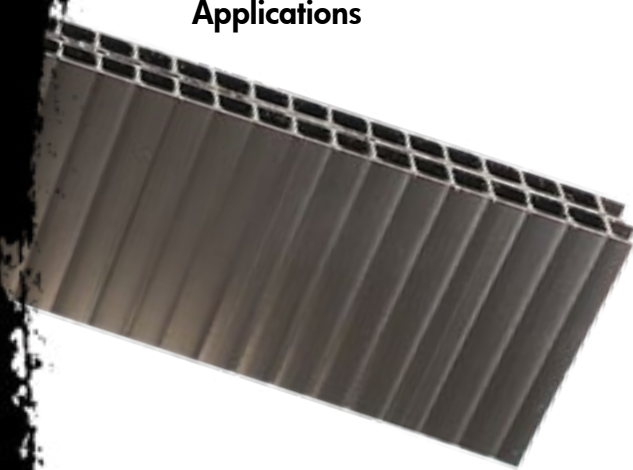

- UV rated batten for open joint applications
- Use as starter strip to help maintain drainage opening at the bottom of the wall with Slicker Rainscreen applications
- Use as Cedar Breather perimeter vent to allow for consistent airflow openings at eaves and rakes

BATTEN UV

Thickness (size of gap)	.375 in (9.5 mm)
Width	1.5 in (.04 m)
Length per batten	37.5 in (.95 m)
Max. UV Exposure	UV Stable
Composition	Polyethylene

Build Better™

with Benjamin Obdyke
Roof & Wall products

SECTIONAL RIDGE VENTILATION

XTRACTOR VENT®

ROLLED RIDGE VENTILATION

ROLL VENT®
RAPID RIDGE®
COUGAR® LP


CEDAR PROTECTION

CEDAR BREATHER®
RAPID RIDGE® 7

BAFFLED RIDGE VENTILATION

SHARK VENT®

ROOF PRODUCTS

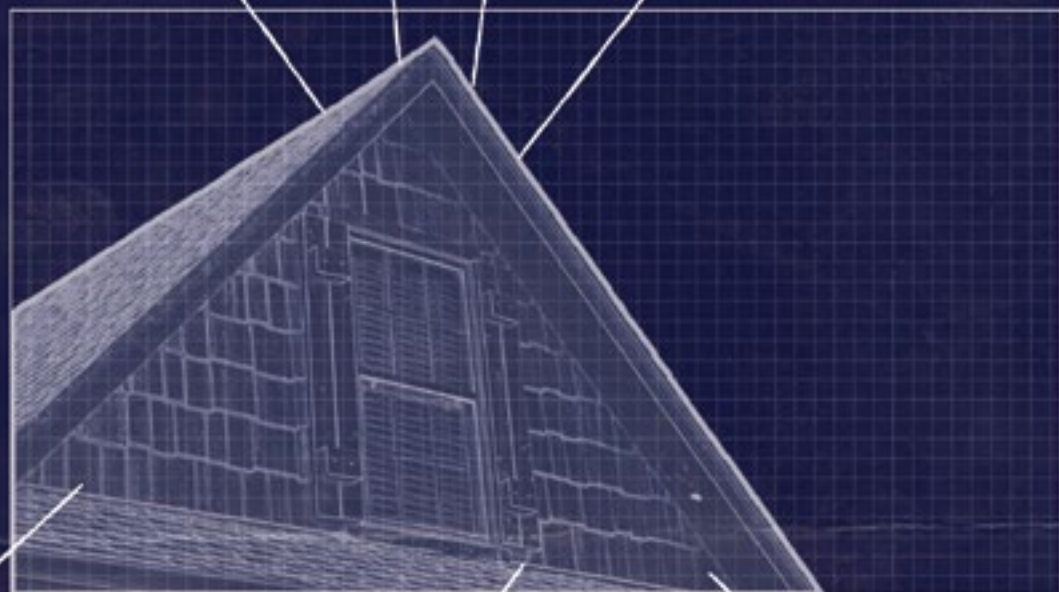

WALL PRODUCTS

DRAINABLE HOUSEWRAP

HYDROGAP®

OPEN JOINT SYSTEM

INVISIWRAP® UV

RAINSCREEN SOLUTIONS

SLICKER® CLASSIC
MAX
HP

FLASHING TAPES

HYDROFLASH® UV+
HYDROFLASH® GP

ACCESSORIES

BATTEN UV **FLATWRAP®**
SLICKER® **HYDROCORNER**
SCREEN

**BENJAMIN
OBDYKE**

400 Babylon Rd. Suite A • Horsham, PA 19044
BenjaminObdyke.com • (800) 523-5261



© 2019 Benjamin Obdyke Incorporated. Cedar Breather®, Cougar®, Slicker®, Roll Vent®, Rapid Ridge®, Shark Vent®, Xtractor Vent®, FlatWrap®, HydroGap®, HydroFlash®, and HydroCorner™ are trademarks or registered trademarks of Benjamin Obdyke Incorporated.
Printed 01/19